

Surge Protective Device

Technical Documentation



The T4SPD is an easy to install surge protector that is used for lighting system protection as well as control panel protection. The T4SPD is capable of handling a 25kA peak surge current (equivalent of a direct lightning strike) and is listed for use inside panels and lighting fixtures.

LH model does not disconnect power on failure. LHT disconnects power on fail. The T4SPD is compact and includes an LED indicator to show that it is working.

Key Specs

- Type 4 SPD

Features

- First Line of Defense Against Surges
- Protects Lighting & Control Panels
- Easy to Install

Applications

- Outdoor and Commercial LED Lighting
- Roadway lighting
- Traffic lighting
- Digital signage
- Wash wall lighting
- Parking garage/lot lighting
- Flood lighting
- Tunnel lighting
- Street lighting


General Technical Specifications	
Voltage	120 240, 277 480V lighting and control circuits
MCOV	150,320, 550 Vac depending on model
Open Neutral Protect	Yes
Response Time	Less than 1 Nanosecond
Nominal Peak Surge	10,000 A
One-time Surge	25,000A
Clamping Voltage	600
Fusing	External Only
Indicator	LED
Included Accessories	90° mounting bracket



DANGER!

Only qualified personnel should install or service this system. Electrical safety precautions must be followed when installing or servicing this equipment. To prevent risk of electrical shock, turn off and lock out all power sources to the unit before making electrical connections or servicing.

Performance

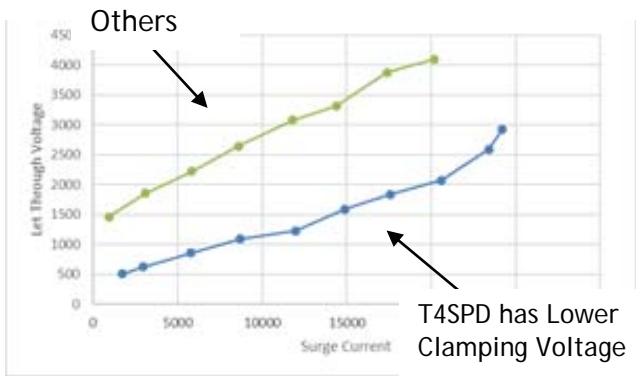


Ordering Information

MODEL

SD05C120-LH	120V, 2W+G
SD05C 277-LH	240-277V, 2W+G
SD05C 480-LH	480V, 2W+G
SD05C 120-LHT	120V, 4W+G (2W in & 2W out)
SD05C 277-LHT	277V, 4W+G (2W in & 2W out)
SD05C 480-LHT	480V, 4W+G (2W in & 2W out)

*Also Available in 5 kA nominal surge models

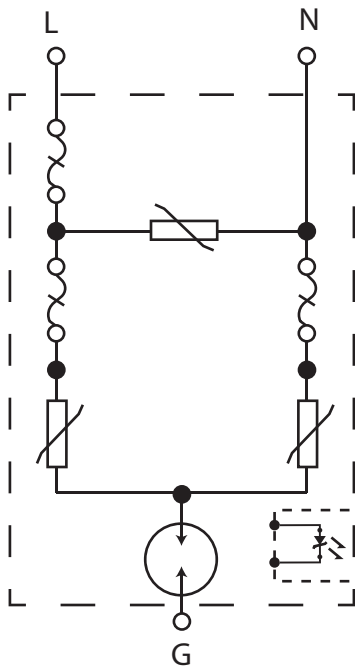

DPS
 1030 Arlington Avenue North
 St. Petersburg, FL 33705
 Phone: (800) 862-4377
www.DiversifiedPower.com



While every precaution has been taken to ensure accuracy and completeness herein, DPS assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.