



Product Name	Gas-Stop ESOV		
Primary Function	Major Leak Shut-Off		
Fitting/Model Number	GSUSA1		
Gas Type	Propane		
Max Working Pressure	26 Bar (2.6 MPa)		
Supply Pressure Range	0.3 Bar - 16 Bar		
Recommended Pressure Regulator	Propane 30-50 mbar (not to be used with an EFV)		
Flow Rate/Capacity	1-1.5 kg/h	Max Dimensions	l: 95mm x w: 35mm x h: 61mm

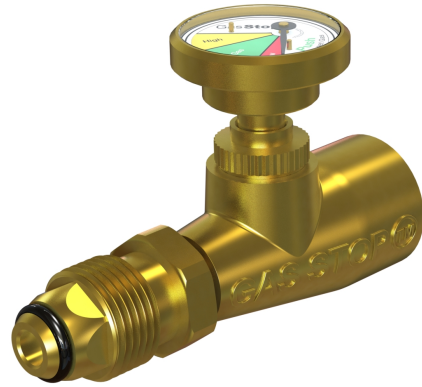

Inlet - 0.885 - 14 NGO LH EXT (G.9)	Outlet - 0.885 - 14 NGO LH INT (G.9)

Additional Information	Pressure Gauge (Propane 0 - 12 bar)
Approval Reference	ISO 16964:2015 & EN 12864:2001+A3:2009 & EN 15202:2012 & EN 16128:2013 & CGA 791 (510)
Shut-off range	≥ 110% Flow Rate
Materials (exc Gauge)	Brass/Viton/NBR/PC Plastic
Burst Pressure	152 Bar
Melting Temp (body)	890c
Operating Temp	Low: -20c High: 55c
Reset Function	Manual Push



Key Attributes	Packaging
100% Shut-Off	Minor Leak Tester
Visual Pressure Gauge	Manual Reset
5 Year Warranty	
	Carton Size
	20pcs/ctn
	Product Packaging
	Plastic Clamshell + SRT
	Instructions
	Included (EN, PT)
	Heat Seal/Tamper Resist
	Yes