

Surge Protective Device

Technical Documentation



The SP8-AV has improved picture and sound quality. Its power cleaning and filtration eliminates common symptoms of contaminated power (including loss of detail, pops, hisses, hums and visual artifacts) and allows your A/V equipment to perform up to its full capability.

In the event of a catastrophic surge such as lightning, it completely disconnects AC power to connected equipment.


Features

- Cable/Sat Protection
- Telephone Line Protection
- 8 Outlets
- Hi-Def Ready

General Technical Specifications

Protect or Disconnect Circuitry	Yes
Thermal Fusing	Yes
Line Voltage	120VAC, 50/60Hz
Initial Clamping Level	200V Peak, 141V RMS
Voltage Protection Rating	500V
Protection Modes	L-N, L-G, N-G
Maximum Current Rating	15A
EMI/RFI Noise Filtration	45dB
Response Time	<1ns
Single Pulse Energy Dissipation	1125 Joules
Dimensions	1.75" H x 5" W x 12" L
Peak Impulse Current	60,000 A
Telco Protection	RJ-11
Weight	3.5 lbs
Universal Cable/Satellite Protection	Female "F", Gold Plated

Diagram

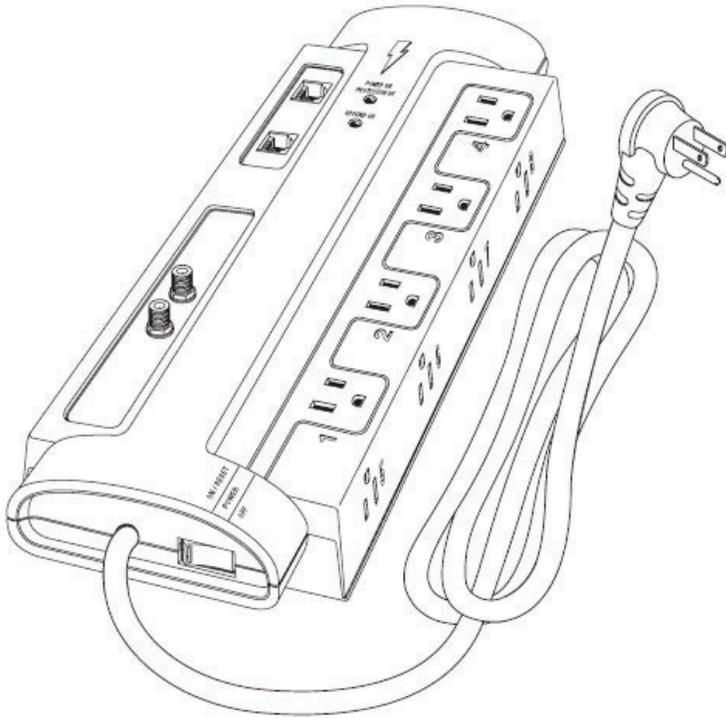

DPS
1030 Arlington Avenue North
St. Petersburg, FL 33705
Phone: (800) 862-4377
www.DiversifiedPower.com



While every precaution has been taken to ensure accuracy and completeness herein, DPS assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.